
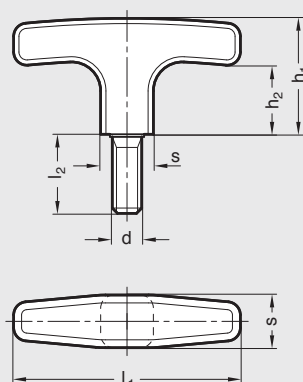


EN 563.1 | Plastic T-Handles

Inch and Metric Size • With Threaded Stud

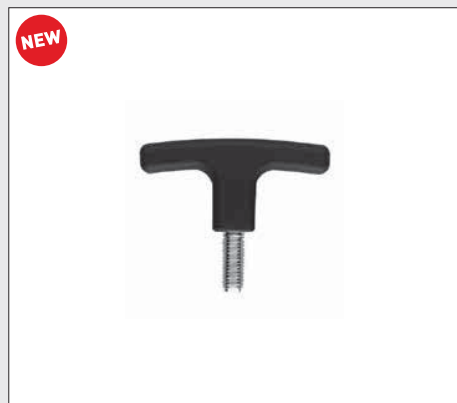

ISO 9001 Supplier

RoHS Compliant

Hand knob

Glass fiber reinforced technopolymer plastic, matte black finish

Threaded stud

Steel, zinc-plated, blue passivated

EN 563.1 T-handles can be used either as operating handles or for clamping purposes, providing high clamping force.

Maximum heat resistance of technopolymer plastic: 130°C (265°F).

Elesa Model L.652.p

Inch Table

Dimensions in: inches (millimeters)

Part Number	Length l ₁	d Thread	l ₂ Stud Length	h ₁	h ₂	s Square
3T75BW0	1.57 (40)	1/4-20	.79 (20)	1.18 (30)	.79 (20)	.51 (13)
5T75BW1	2.17 (55)	5/16-18	.79 (20)	1.30 (33)	.87 (22)	.55 (14)
5T1BW2	2.64 (67)	5/16-18	.98 (25)	1.46 (37)	.98 (25)	.63 (16)
6T126BW3	3.15 (80)	3/8-16	1.18 (30)	1.61 (41)	1.02 (26)	.79 (20)
8T126BW4	3.70 (94)	1/2-13	1.18 (30)	1.77 (45)	1.12 (28.5)	.83 (21)

Metric Table

Dimensions in: millimeters (inches)

Part Number	Length l ₁	d Thread	l ₂ Stud Length	h ₁	h ₂	s Square
6N20BW0	40 (1.57)	M6 x 1	20 (.79)	30 (1.18)	20 (.79)	13 (.51)
8N20BW1	55 (2.17)	M8 x 1.25	20 (.79)	33 (1.30)	22 (.87)	14 (.55)
8N25BW2	67 (2.64)	M8 x 1.25	25 (.98)	37 (1.46)	25 (.98)	16 (.63)
10N30BW3	80 (3.15)	M10 x 1.5	30 (1.18)	41 (1.61)	26 (1.02)	20 (.79)
12N30BW4	94 (3.70)	M12 x 1.75	30 (1.18)	45 (1.77)	28.5 (1.12)	21 (.83)