


GN 212.5 | Stainless Steel Heavy Duty Adjustable Levers

Threaded Stud Type Type • Inch and Metric Size

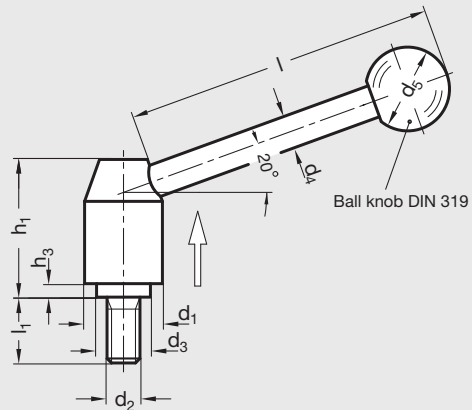

1

Adjustable Levers

ISO 9001 Supplier

RoHS Compliant

Body, arm and insert

Stainless steel sandblasted satin finish
European standard No. 1.4305
(American standard 303 series)

Spring

Stainless steel
European standard No. 1.4310
(American standard 301 series)

Ball Knob

Black phenolic plastic, DIN 319 series

Stainless steel heavy duty adjustable tension levers GN 212.5 have proven to be ideal wherever parts have to be clamped in a confined space, or if a particular lever position is required. The threaded insert is connected with the hub via serrations which can be disengaged.

Pulling the lever upward disengages the serrations, allowing it to be swivelled to the best clamping position.

On releasing the lever, it will automatically re-engage.

Special threads and stud lengths are available upon request.

Inch Table

Dimensions in: inches (millimeters)

Part Number	d ₁	d ₂ Thread	l ₁ Stud Length	d ₃	d ₄	d ₅	h ₁	h ₃	l ₂
5T16L74/E	.83 (21)	5/16-18	.63	.53 (13.5)	.31 (8)	.79 (20)	1.32 (33.5)	.04 (1)	2.76 (70)
5T20L74/E			.78						
5T25L74/E			.98						
5T32L74/E			1.26						
5T40L74/E			1.57						
5T50L74/E			1.97						
5T63L74/E	2.48								
6T20L75/E	.94 (24)	3/8-16	.78	.63 (16)	.39 (10)	.98 (25)	1.57 (40)	.10 (2.5)	3.78 (96)
6T25L75/E			.98						
6T32L75/E			1.26						
6T40L75/E			1.57						
6T50L75/E			1.97						
6T63L75/E			2.48						
8T25L76/E	1.10 (28)	1/2-13	.98	.75 (19)	.47 (12)	1.18 (30)	1.91 (48.5)	.18 (4.5)	4.33 (110)
8T32L76/E			1.26						
8T40L76/E			1.57						
8T50L76/E			1.97						
8T63L76/E			2.48						

Metric Table

Dimensions in: millimeters (*inches*)

Part Number	d ₁	d ₂ Thread	l ₁ Stud Length	d ₃	d ₄	d ₅	h ₁	h ₃	l ₂
8N16L74/E	21 (.83)	M8 x 1.25	16	13.5 (.53)	8 (.31)	20 (.79)	33.5 (1.32)	1 (.04)	70 (2.76)
8N20L74/E			20						
8N25L74/E			25						
8N32L74/E			32						
8N40L74/E			40						
8N50L74/E			50						
8N63L74/E			63						
10N20L75/E	24 (.94)	M10 x 1.5	20	16 (.63)	10 (.39)	25 (.98)	40 (1.57)	2.5 (.10)	96 (3.78)
10N25L75/E			25						
10N32L75/E			32						
10N40L75/E			40						
10N50L75/E			50						
10N63L75/E			63						
10N80L75/E			80						
12N25L76/E	28 (1.10)	M12 x 1.75	25	19 (.75)	12 (.47)	30 (1.18)	48.5 (1.91)	4.5 (.18)	110 (4.33)
12N32L76/E			32						
12N40L76/E			40						
12N50L76/E			50						
12N63L76/E			63						
12N80L76/E			80						