


SHA/MRP | Plastic Solid Disk Handwheels

With Locking Retractable Handle

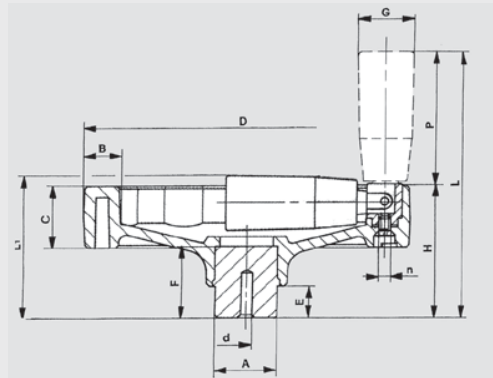

RoHS Compliant

Handwheel body

Black glass filled nylon plastic, matte finish

Hub

Steel zinc plated, molded-in

Revolving retractable handle

Black glass filled nylon plastic hand piece with zinc plated steel stem and chrome plated mechanism

Both dimensions, inch and metric, are interchangeable

SHA/MRP thermoplastic handwheels with revolving retractable handles are distinguished by their modern design. By pulling up on the handle 90°, the handle locks into the rotating position. Disengage the handle by pulling it out and moving it down 90° back to the center of the handwheel. A compression spring secures the handle in either position.

These handwheels are an excellent choice for applications requiring the handle to be kept out of harms way.

Maximum heat resistance of nylon plastic: 110°C (230°F).

Special bores, keyways, set screw holes, etc. available upon request.

Countersunk washers for handwheel retention, see GN 184, page 661.

Metric Table

Dimensions in: millimeters (*inches*)

Part Number	D	d Pilot Hole	H	L	L ₁	C	B	A	E	F	G	P	n Thread
6381005	100 (3.94)	4 (.16)	46 (1.81)	98 (3.86)	50 (1.97)	20 (.79)	15 (.59)	24 (.94)	12 (.47)	24 (.94)	21 (.83)	52 (2.05)	M4 x .7
6381010	125 (4.92)	6 (.24)	51 (2.01)	103 (4.06)	54 (2.13)	24 (.94)	17 (.67)	24 (.94)	12 (.47)	28 (1.10)	21 (.83)	52 (2.05)	M4 x .7
6381015	160 (6.30)	6 (.24)	61 (2.40)	133 (5.24)	65 (2.56)	28 (1.10)	20 (.79)	32 (1.26)	15 (.59)	31 (1.22)	23 (.91)	72 (2.83)	M5 x .8
6381020	200 (7.87)	6 (.24)	74 (2.91)	166 (6.54)	79 (3.11)	32 (1.26)	24 (.94)	40 (1.57)	15 (.59)	40 (1.57)	26 (1.02)	92 (3.62)	M6 x 1.0