


VU | Phenolic Plastic Five-Lobed Control Knobs

With Steel Hub



STOCK

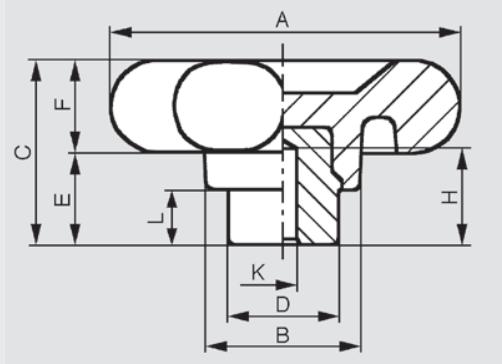

RoHS Compliant

Body

Black phenolic plastic

Hub

Zinc plated steel, molded-in

Both dimensions, inch and metric, are interchangeable.

Five-lobed control knobs VU type are ideally suited for light-medium duty adjusting or clamping applications.

Other five-lobed control knobs, see VUA, page 477.

Five-lobed control knobs with revolving handle, see VUM, page 479.

Maximum heat resistance: 150°C (300°F).

Modifications such as inch and metric blind bores, threads, etc. available upon request.

Dimensions in: millimeters (inches)

9

Metric Table

Control Knobs

Part Number	A	K Pilot Hole	D	B	F	E	H	L	C
6124000	60 (2.36)	4 (.157)	20 (.79)	30 (1.18)	16 (.63)	16 (.63)	15 (.59)	10 (.39)	32 (1.26)
6124005	75 (2.95)	4 (.157)	24 (.94)	34 (1.34)	20 (.79)	19 (.75)	22 (.87)	11 (.43)	39 (1.54)
6124010	90 (3.54)	6 (.236)	32 (1.26)	44 (1.73)	20 (.79)	22 (.87)	25 (.98)	12 (.47)	42 (1.65)