


MCG | Plastic Revolving Handles

Metric Size • With Threaded Steel Spindle

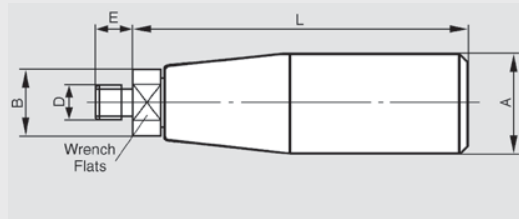

RoHS Compliant

Hand piece

Black phenolic plastic
(Duroplast PF)

Threaded spindle

Zinc plated steel with wrench flats

This cylindrical revolving handle can be used on most any devices where leverage for turning is required, i.e., handwheels or crank handles.

Maximum heat resistance of phenolic plastic hand piece: 150°C (300°F).

Metric Table

Dimensions in: millimeters (*inches*)

Part Number	A	D Thread	B	E	L
6138005	17	M6 x 1.0	12	8	45
6138010	(.67)	M8 x 1.25	(.47)	(.31)	(1.77)
6138012	21	M8 x 1.25	16	10	56
6138013	(.83)	M10 x 1.5	(.63)	(.39)	(2.20)
6138015	23	M8 x 1.25	16	10	61
6138017	(.91)	M10 x 1.5	(.63)	(.39)	(2.40)
6138018	25	M8 x 1.25	18	13	71
6138020	(.98)	M10 x 1.5	(.71)	(.51)	(2.80)
6138025	28	M10 x 1.5	20	13	92
6138030	(1.10)	M12 x 1.75	(.79)	(.51)	(3.62)
6138035	29	M10 x 1.5	20	13	122
6138040	(1.14)	M12 x 1.75	(.79)	(.51)	(4.80)