



ISO 9001 Supplier


RoHS Compliant



GN 612.2 | Cam Action Indexing Plungers

Metric Size • With Mounting Flange •
With or without Plastic Sleeve

Body	Steel, black oxide finish
Plunger pin	Steel, ground and nitrided
Diameter d_1	.24 – .47 inch (6 – 12 mm)
Diameter d_2	.63 – .79 inch (16 – 20 mm)

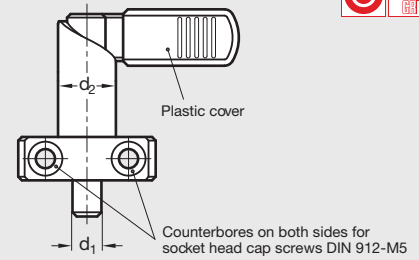

ISO 9001 Supplier


RoHS Compliant



GN 612.3 | Square Weldable Cam Action Indexing Plungers

Metric Size • With or without Plastic Sleeve

Body	Steel, black oxide finish
Plunger pin	Steel, ground and nitrided
Diameter d	.24 – .47 inch (6 – 12 mm)
Diameter s	.63 – .79 inch (16 – 20 mm)

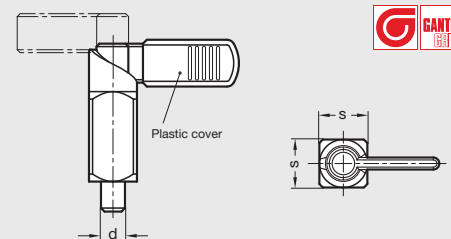


RoHS Compliant



LRSS | Hand Retractable Spring Plungers

Inch Size • With Knurled Handle •
Lock-Out Type

Body and Pin	Stainless steel
Thread A	1/4-20 – 1/2-13
Length B	.400 – .650 inch (10.16 – 16.51 mm)
Diameter E	.50 – 1.00 inch (12.70 – 25.40 mm)

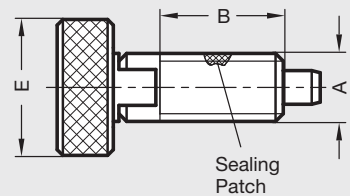

ISO 9001 Supplier

RoHS Compliant



GN 817-NI | Indexing Plungers with Multiple Pin Lengths

Metric Size • Threaded Body • Non Lock-Out
Type • With Pull Knob or Threaded Spindle

Body	Stainless steel
Knob	Nylon plastic
Diameter d_1	.16 – .39 inch (4 – 10 mm)
Diameter d_2	M8 – M16

