




**GN 913.2 | Set Screws**

Metric Size • With Hardened Spherical or Pointed Tip

<b>Body</b>	Steel, black oxide finish
<b>Nose</b>	hardened
<b>Thread <math>d_1</math></b>	M5 – M10
<b>Length <math>l_1</math></b>	8 – 40 mm
<b>Diameter <math>d_2</math></b>	.12 – .31 inch (3 – 8 mm)



ISO 9001 Supplier

RoHS Compliant



**GN 551.1 | Fully Threaded Studs**

Metric Size

<b>Body</b>	Steel, plain finish
<b>Thread <math>d</math></b>	M6 – M20
<b>Length <math>l</math></b>	20 – 100 mm



ISO 9001 Supplier

RoHS Compliant

11


Jig, Fixture and Fastening Components



**GN 252 | Threaded Plugs**

Metric Size

<b>Body</b>	Steel, black oxide finish
<b>Thread <math>d</math></b>	M12 – M33
<b>Height <math>h</math></b>	.39 – .47 inch (10 – 12 mm)
<b>A/F</b>	.24 – .67 inch (6 – 17 mm)

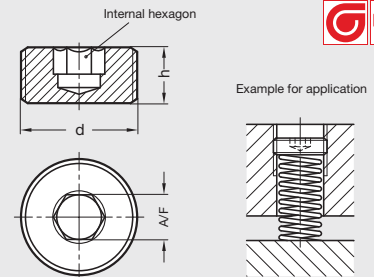

ISO 9001 Supplier

RoHS Compliant




**STP | Serrated Toggle Pads**

Inch Size



<b>Body</b>	Steel or stainless steel
<b>Thread <math>A</math></b>	1/4-20 – 1-8
<b>Height <math>C</math></b>	.63 – 1.83 inch (16 – 46.48 mm)

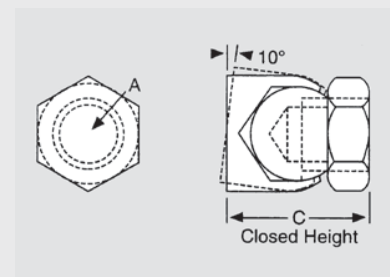

RoHS Compliant