


# VUM | Phenolic Plastic Five-Lobed Control Knobs

With Revolving Handle



STOCK

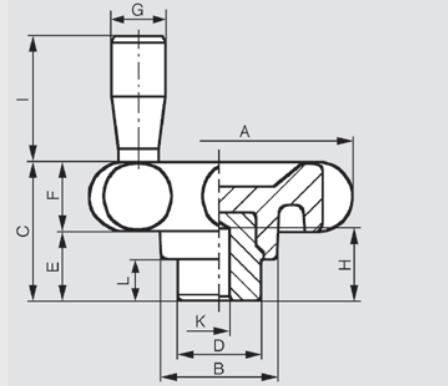

RoHS Compliant

## Body

Black phenolic plastic

## Hub

Zinc plated steel, molded-in

## Revolving handle

Black phenolic with zinc plated steel spindle

Both dimensions, inch and metric,  
are interchangeable.

Five-lobed control knobs VUM are ideally suited  
for light-medium duty adjusting or clamping  
applications.

Other five-lobed control knobs, see VU,  
page 478 and VUA, page 477.

Maximum heat resistance: 150°C (300°F).  
Modifications such as inch and metric blind  
bores, threads, etc. available upon request.

## Metric Table

Dimensions in: millimeters (inches)

Part Number	A	K Pilot Hole	D	B	L	H	I	F	E	C	G
6125005	75 (2.95)	4 (.157)	24 (.94)	34 (1.34)	11 (.43)	22 (.87)	43 (1.69)	20 (.79)	19 (.75)	39 (1.54)	17 (.67)
6125010	90 (3.54)	6 (.236)	32 (1.26)	44 (1.73)	12 (.47)	25 (.98)	43 (1.69)	20 (.79)	22 (.87)	42 (1.65)	17 (.67)

9

Control Knobs