




CALL **GN 251 | Clamping Screws**
Metric Size

Body Steel, black oxide finish
Thread d M6 – M16
Length l_1 30 – 80 mm
Across flats s .39 – .94 inch (10 – 24 mm)

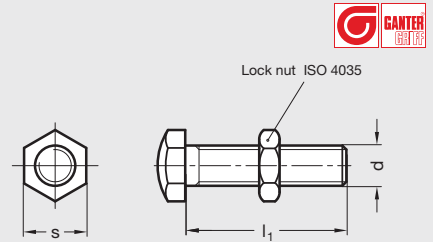


ISO 9001 Supplier

RoHS Compliant



CALL **GN 251.2 | Stop Bolts**
Metric Size

Bolt Steel, nickel-plated
Voltage 12 – 24 V DC
Thread d M6 – M10
Length l_1 .83 – .98 inch (21 – 25 mm)

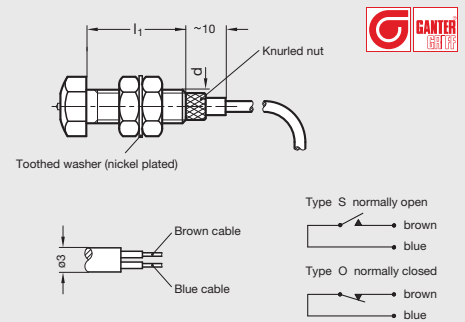


ISO 9001 Supplier

RoHS Compliant



CALL **GN 230 | Tenon Nuts**
Metric Size

Body Steel, black oxide finish
Width b .39 – .87 inch (10 – 22 mm)
Diameter d_1 .18 – .26 inch (4.5 – 6.6 mm)
Diameter d_2 .31 – .43 inch (8 – 11 mm)

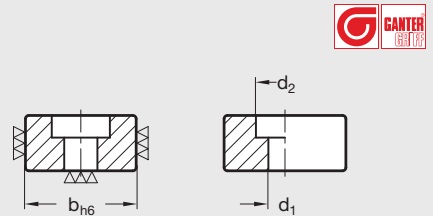


ISO 9001 Supplier

RoHS Compliant



STOCK **GN 770 | Locating Pin Bushings**
Metric Size • Plain or Flanged Bushing

Body Steel, hardened
Diameter d_1 .20 – .39 inch (5 – 10 mm)
Diameter d_2 .39 – .59 inch (10 – 15 mm)
Length l_1 8 – 20 mm

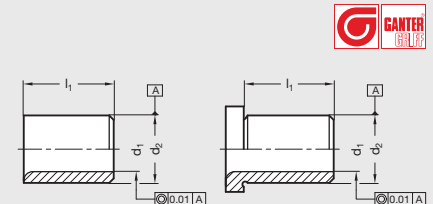

ISO 9001 Supplier

RoHS Compliant