


GN 333.5 | Stainless Steel Tubular Grip Handles

Straight • Metric Size

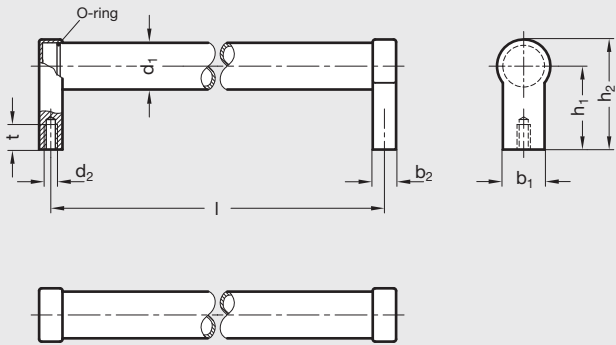

ISO 9001 Supplier

RoHS Compliant

Tube
28 mm diameter x 2 mm wall thickness,
Stainless steel, European standard 1.4301
(American Standard 304), dia. 28 mm, polished
matte finish

Handle legs
Precision-cast stainless steel, European
standard 1.4308, sand-blasted matte finish

GN 333.5 tubular handles are a low-cost option
for applications requiring stainless steel.
Handle legs are highly stable in relation to their
small dimensions. Tube and legs are secured
together with self-tapping screws.
O-rings at the joining of the tube and legs
prevent water from entering the tube.

Typical use is on double winged swinging doors
and sliding doors on machines.
Handles in special lengths available upon
request.

Metric Table

Dimensions in: millimeters (inches)

Part Number	d ₁	l ₁ ±0.2	d ₂ Tapped	b	h ₁	h ₂	l ₂	l ₃	t min.
28W200B92	28 (1.10)	200 (7.87)	M8 x 1.25	25 (.98)	50 (1.97)	66 (2.60)	214 (8.43)	186 (7.32)	15 (.59)
28W250B92	28 (1.10)	250 (9.84)	M8 x 1.25	25 (.98)	50 (1.97)	66 (2.60)	264 (10.39)	236 (9.29)	15 (.59)
28W300B92	28 (1.10)	300 (11.81)	M8 x 1.25	25 (.98)	50 (1.97)	66 (2.60)	314 (12.36)	286 (11.26)	15 (.59)
28W400B92	28 (1.10)	400 (15.75)	M8 x 1.25	25 (.98)	50 (1.97)	66 (2.60)	414 (16.30)	386 (15.20)	15 (.59)
28W500B92	28 (1.10)	500 (19.69)	M8 x 1.25	25 (.98)	50 (1.97)	66 (2.60)	514 (20.24)	486 (19.13)	15 (.59)
28W600B92	28 (1.10)	600 (23.62)	M8 x 1.25	25 (.98)	50 (1.97)	66 (2.60)	614 (24.17)	586 (23.07)	15 (.59)