


VUA | Phenolic Plastic Five-Lobed Control Knobs

With Through Steel Hub

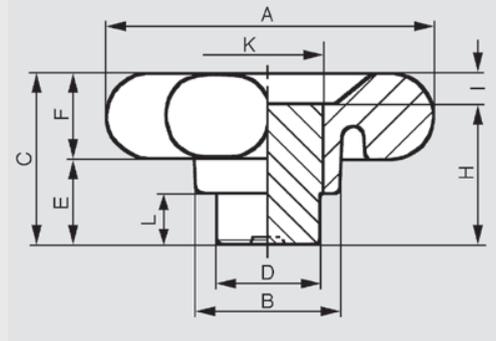

RoHS Compliant

Body

Black phenolic plastic

Hub

Zinc plated steel, molded-in

Both dimensions, inch and metric, are interchangeable.

Five-lobed control knobs VUA type are ideally suited for light-medium adjusting or clamping applications.

Other five-lobed control knobs, see VU, page 478.

Five-lobed control knobs with revolving handle, see VUM, page 479.

Maximum heat resistance: 150°C (300°F).

Modifications such as metric and inch size through bores, blind bores or threaded bores available upon request.

Metric Table

Dimensions in: millimeters (inches)

Part Number	A	Bore	D	B	L	H	I	F	E	C	K
6126000	60 (2.36)	Blank	24 (.94)	34 (1.34)	10 (.39)	26 (1.02)	6 (.24)	16 (.63)	16 (.63)	32 (1.26)	26 (1.02)
6126005	75 (2.95)	Blank	30 (1.18)	40 (1.57)	12 (.47)	32.5 (1.28)	7.5 (.30)	20 (.79)	20 (.79)	40 (1.57)	32 (1.26)
6126010	90 (3.54)	Blank	35 (1.38)	47 (1.85)	14 (.55)	36.7 (1.44)	7.3 (.29)	20 (.79)	24 (.94)	44 (1.73)	40 (1.57)