


**STOCK** **GN 323.4 | Aluminum Safety Clutch Handwheels**

**T** With Friction Bearing Mechanism • Metric Size • Solid Disk

**Body** Aluminum, black powder coated pebble finish  
**Clutch** GN 000.4 series, page 249  
**Diameter  $d_1$**  4.92 – 9.84 inch (125 – 250 mm)  
**Diameter  $d_2$**  .472 – .866 inch (12 – 22 mm)  
**Types** Engage by Pulling or Pushing

ISO 9001 Supplier

RoHS Compliant

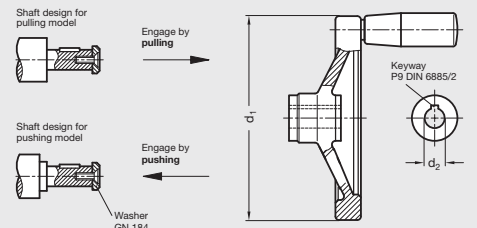


**STOCK** **GN 323.5 | Aluminum Safety Clutch Handwheels**

**T** With Needle Bearing Mechanism • Metric Size • Solid Disk

**Body** Aluminum, black powder coated pebble finish  
**Clutch** GN 000.5 series, page 250  
**Diameter  $d_1$**  4.92 – 9.84 inch (125 – 250 mm)  
**Diameter  $d_2$**  .472 – .866 inch (12 – 22 mm)  
**Types** Engage by Pulling or Pushing

ISO 9001 Supplier

RoHS Compliant

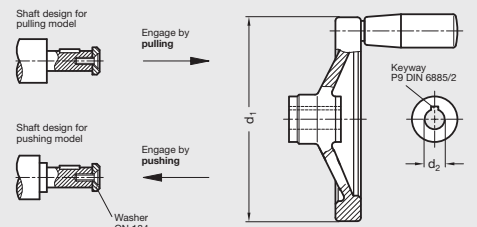


**CALL** **GN 322.4 | Aluminum Safety Clutch Handwheels**

**T** With Friction Bearing Mechanism • Metric Size • Two Spoked

**Body** Aluminum, see GN 322 series  
**Clutch** GN 000.4 series, page 249  
**Diameter  $d_1$**  4.92 – 9.84 inch (125 – 250 mm)  
**Diameter  $d_2$**  .472 – .866 inch (12 – 22 mm)  
**Types** Engage by Pulling or Pushing

ISO 9001 Supplier

RoHS Compliant

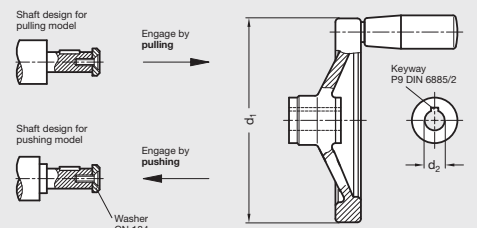

**CALL** **GN 322.5 | Aluminum Safety Clutch Handwheels**

**T** With Needle Bearing Mechanism • Metric Size • Two Spoked

**Body** Aluminum, see GN 322 series  
**Clutch** GN 000.5 series, page 250  
**Diameter  $d_1$**  4.92 – 9.84 inch (125 – 250 mm)  
**Diameter  $d_2$**  .472 – .866 inch (12 – 22 mm)  
**Types** Engage by Pulling or Pushing

ISO 9001 Supplier

RoHS Compliant

