


GN 667 | Aluminum Tubular Grip Handles

Metric Size • With Socket Head Cap Screws

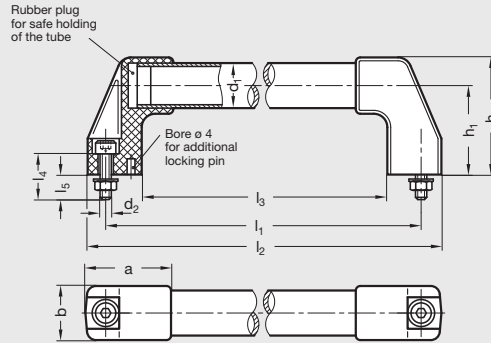

3

ISO 9001 Supplier

RoHS Compliant

Handle legs

Smooth matte black glass filled nylon plastic (Polyamide), with socket head cap screws for mounting

Handle tubing

Aluminum Ø 30mm x 1.5mm wall thickness
"Black-Pebble Finish" electrostatically applied powder coat or natural anodized finish

Tube end caps

Matte black nylon plastic

Mounting screws

Socket cap screw DIN 912 – M10 x 35 8.8 black steel

Hex jam nut

DIN 936/ISO 4032 – M10 zinc plated steel

Flat washer

DIN 125 – M10 zinc plated steel

*U.S. standard size 3/8-16 socket cap screws can also be used for mounting.

GN 667 tubular pull handles are very versatile because special lengths of handles can be ordered complete in smaller quantities.

If desired, handle legs may be ordered individually to make your own special length of handle (request part number 30WXA1).

Nylon plastic legs have maximum heat resistance: 100°C (212°F).

Various metric and inch size fasteners and kit packaging available upon request

Metric Table

Dimensions in: millimeters (inches)

Part Number		d ₁	l ₁	d ₂ Thread	a	b	l ₄	l ₅	h ₁	h ₂	l ₂	l ₃
Black Coated Finish	Natural Anodized Finish											
30W300X14/SM	30W300X14/EL	30 (1.18)	300 (11.81)	M10 x 1.5 (3/8-16)*	57 (2.24)	38 (1.50)	35 (1.38)	20 (.79)	60 (2.36)	78 (3.07)	324 (12.76)	254 (10.00)
30W350X14/SM	30W350X14/EL	30 (1.18)	350 (13.78)	M10 x 1.5 (3/8-16)*	57 (2.24)	38 (1.50)	35 (1.38)	20 (.79)	60 (2.36)	78 (3.07)	374 (14.72)	304 (11.97)
30W400X14/SM	30W400X14/EL	30 (1.18)	400 (15.75)	M10 x 1.5 (3/8-16)*	57 (2.24)	38 (1.50)	35 (1.38)	20 (.79)	60 (2.36)	78 (3.07)	424 (16.69)	354 (13.94)
30W500X14/SM	30W500X14/EL	30 (1.18)	500 (19.69)	M10 x 1.5 (3/8-16)*	57 (2.24)	38 (1.50)	35 (1.38)	20 (.79)	60 (2.36)	78 (3.07)	524 (20.63)	454 (17.87)
30W600X14/SM	30W600X14/EL	30 (1.18)	600 (23.62)	M10 x 1.5 (3/8-16)*	57 (2.24)	38 (1.50)	35 (1.38)	20 (.79)	60 (2.36)	78 (3.07)	624 (24.57)	554 (21.81)
30W700X14/SM	30W700X14/EL	30 (1.18)	700 (27.56)	M10 x 1.5 (3/8-16)*	57 (2.24)	38 (1.50)	35 (1.38)	20 (.79)	60 (2.36)	78 (3.07)	724 (28.50)	654 (25.75)