




**GN 200-NI | Indexing Mechanisms**

Metric Size • With or without Graduations



<b>Body</b>	Stainless steel
<b>Markings</b>	Laser engraved
<b>Diameter <math>d_1</math></b>	1.73 – 2.05 inch (44 – 52 mm)
<b>Bore <math>d_2</math></b>	K10 – K16 (with Keyway)



ISO 9001 Supplier

RoHS Compliant





NEW



**GN 900 | Adjustable Slide Units**

Metric Size • Different Versions available

<b>Slides</b>	Aluminum extrusion
<b>Assembly</b>	Stainless steel
<b>Hardware</b>	
<b>Size b</b>	30 – 120 mm
<b>Length <math>l_1</math></b>	50 – 260 mm
<b>Stroke <math>l_2</math></b>	5 – 100 mm

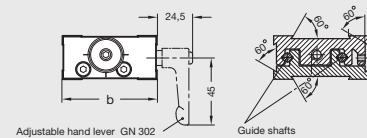

ISO 9001 Supplier

RoHS Compliant





NEW



**GN 900.1 | Fastening Units**

Metric Size

<b>Rails</b>	Aluminum, anodized, natural color
<b>Size b</b>	30 – 120 mm
<b>Length <math>l_1</math></b>	1.61 – 5.71 inch (41 – 145 mm)
<b>Thread <math>d_1/d_2</math></b>	M2.5 – M5

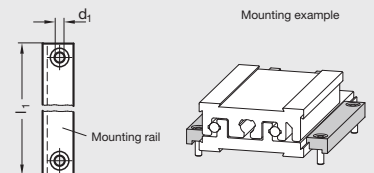

ISO 9001 Supplier

RoHS Compliant





NEW



**GN 900.2 | Connecting Sets X-Y**

Metric Size

<b>Rails</b>	Aluminum, anodized, natural color
<b>Size b</b>	1.18 – 4.72 inch (30 – 120 mm)
<b>Length <math>l_1</math></b>	1.61 – 5.71 inch (41 – 145 mm)
<b>Thread <math>d_1</math></b>	M2.5 – M5



ISO 9001 Supplier

RoHS Compliant