




LRHS | Hand Retractable Spring Plungers

Inch Size • With L Handle • Lock-Out Type

Body and Pin	Stainless steel
Thread A	1/4-20 – 5/8-11
Diameter D	.16 – .38 inch (4.06 – 9.65 mm)
Length H	.80 – 2.00 inch (20.32 – 50.80 mm)

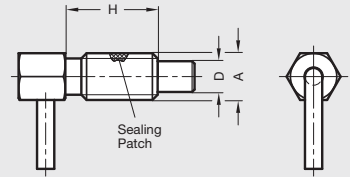

RoHS Compliant




GN 614.1 | Holding Blocks

Metric Size • For Press-Fit Ball Plungers

Body	Zinc die-cast, nickel-plated
Diameter d₁	.24 – .31 inch (6 – 8 mm)
Diameter d₂	.20 – .26 inch (5 – 6.5 mm)
Width b	.33 – .41 inch (8.5 – 10.5 mm)

Spring plunger GN 614



ISO 9001 Supplier


RoHS Compliant



GN 250 | Positioning Blocks

Metric Size • For Spring Plungers

Body	Steel, case hardened and blackened
Height h	.33 – .41 inch (8.5 – 10.5 mm)
For	GN 614, GN 614 and GN 615.2

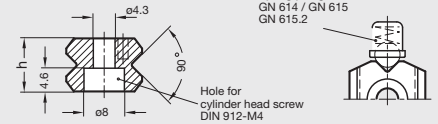

10

Indexing, Spring and Ball Plungers

ISO 9001 Supplier


RoHS Compliant



GN 249 | Ball Buttons

Metric Size

Body	Steel, hardened and ground
Diameter d₁	.16 – .63 inch (4 – 16 mm)
Diameter d₃	.06 – .31 inch (1.5 – 8 mm)
For	GN 614, GN 615, GN 615.1, GN 616



ISO 9001 Supplier

RoHS Compliant