


**SPSSDN | Short Spring Plungers**

Inch Size • With Delrin Nose



<b>Body</b>	Stainless steel
<b>Thread A</b>	8-32 – 5/8-11
<b>Diameter D</b>	.069 – .309 inch (1.75 – 7.85 mm)
<b>Length B</b>	.63 – 1.50 inch (16.00 – 38.10 mm)




RoHS Compliant



**GN 713 | Side Thrust Pins**

Metric Size

<b>Body and Pin</b>	Steel, zinc-plated
<b>Diameter <math>d_1</math></b>	.197 – .394 inch (5 – 10 mm)
<b>Thread <math>d_2</math></b>	M12 – M18
<b>Side Thrust F</b>	20 – 300 N

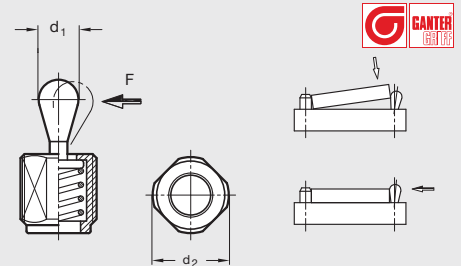

ISO 9001 Supplier

Call for RoHS


10



**GN 714 | Side Thrust Pins**

Metric Size • Press Fit • Tapped without Pin

<b>Body</b>	Aluminum, gold passivated
<b>Diameter <math>d_1</math></b>	.394 – .630 inch (10 – 16 mm)
<b>Thread <math>d_2</math></b>	M4 – M6
<b>Side Thrust <math>F_0</math></b>	20 – 300 N

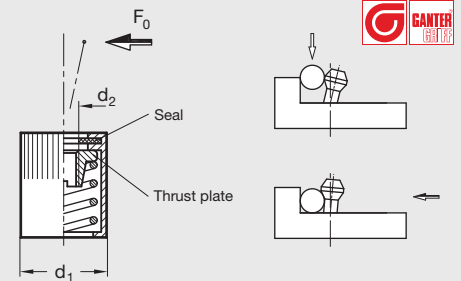

ISO 9001 Supplier


Call for RoHS



**GN 715.2 | Eccentric Bushings**

Metric Size • For Side Thrust Pins GN 715

<b>Bushing</b>	Steel, black oxide finish
<b>Diameter <math>d_1</math></b>	.24 – .63 inch (6 – 16 mm)
<b>Diameter <math>d_2</math></b>	.47 – .98 inch (12 – 25 mm)
<b>Height I</b>	.39 – .70 inch (9.9 – 17.9 mm)

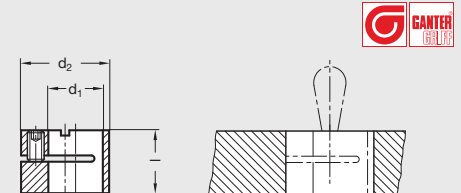

ISO 9001 Supplier

Call for RoHS