


GN 319.2 | Plastic Revolving Ball Knobs

Inch and Metric Size • Long Shoulder Type



Internal hexagon
(for tightening purposes)

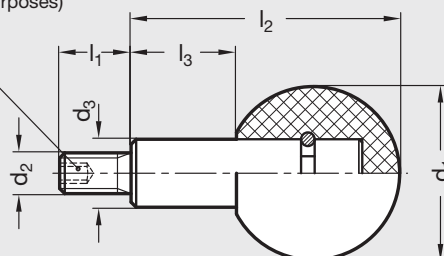

4

Revolving and Operating Handles

ISO 9001 Supplier

RoHS Compliant

Revolving ball knob

Black phenolic plastic (Duroplast PF)

Threaded Spindle

Steel, zinc-plated

Revolving ball knobs GN 319.2 have a polished smooth finish and can be utilized instead of revolving handles, i.e. with handwheels.

Revolving ball knobs have the same assembly dimensions as the series DIN 39, DIN 98, and GN 598 handles.

Maximum heat resistance of phenolic plastic:
150°C (300°F).

For certain minimum quantities, revolving ball knobs with internal threaded shafts are available upon request.

DIN 911 hex keys used for mounting these handles, are available upon request.

Inch Table

Dimensions in: inches (millimeters)

Part Number	d ₁	d ₂ Thread	d ₃	l ₁	l ₂	l ₃	Int. Hex A/F
3TB55	.98 (25)	1/4 - 20	.39 (10)	.43 (11)	1.48 (37.5)	.59 (15)	.118 (3)
5TB56	1.26 (32)	5/16 - 18	.51 (13)	.51 (13)	1.89 (48)	.75 (19)	.157 (4)
6TB57	1.57 (40)	3/8 - 16	.63 (16)	.55 (14)	2.40 (61)	.94 (24)	.197 (5)
8TB58	1.97 (50)	1/2 - 13	.79 (20)	.83 (21)	3.07 (78)	1.22 (31)	.236 (6)

Metric Table

Dimensions in: millimeters (inches)

Part Number	d ₁	d ₂ Thread	d ₃	l ₁	l ₂	l ₃	Int. Hex A/F
6NB55	25 (.98)	M6 x 1.0	10 (.39)	11 (.43)	37.5 (1.48)	15 (.59)	3 (.118)
8NB56	32 (1.26)	M8 x 1.25	13 (.51)	13 (.51)	48 (1.89)	19 (.75)	4 (.157)
10NB57	40 (1.57)	M10 x 1.5	16 (.63)	14 (.55)	61 (2.40)	24 (.94)	5 (.197)
12NB58	50 (1.97)	M12 x 1.75	20 (.79)	21 (.83)	78 (3.07)	31 (1.22)	6 (.236)