



GRUPO PEGAMO DESDE 1982



SUMINISTRO INDUSTRIAL

En Pegamo Suministro Industrial llevamos desde 1982 vendiendo, alquilando y reparando Herramienta Hidráulica, Herramienta Neumática y Herramienta Manual de las principales marcas del mercado.

Te asesoramos para que encuentres la mejor solución a las necesidades de tu empresa.

CONTACTA CON NOSOTROS

Pol. Lintzirin Gaina, B2
20180 Oiartzun.
Gipuzkoa - Spain

suministros@pegamo.es
T. 943 491 788
F. 943 371 001

> Power Team®

powerteam.com



10 AND 25 TON START-UP KITS



CONVENIENTLY PACKAGED MRO
LIFTING AND POSITIONING KITS

SPX®

Order No.:
SK10T



Features & Benefits

- 10 Ton Start-Up Kit covers a range of lifting, shifting, and positioning needs
- Broad range of cylinder types and strokes to fit many applications
- Neatly packaged in a durable, molded storage case to securely house your equipment and is ready to use upon opening
- All sets include a t-adaptor (**No. 9670**), a complete coupler set (**No. 9795**), and a quart of oil (**No. 9636**)
- SK10TE kit is CE Compliant



Hand Pump is secured by an integrated strap in case.

Ordering Information

Kit Contents				Order No	
Hand Pump	Usable Oil Cap. in ³ (cc)	Volume Per Stroke Low / High Press. in ³ (cc)	Weight lb (kg)	SK10T	SK10TE
P19L	27 (443)	0.25 / 0.05 (4.1 / 0.9)	5.1 (2.3)	X	X
Gauge	Type	Primary Units	Face Diameter in (mm)		
9040	analog	psi	2.5 (63.5)	X	
9040E	analog	bar	2.5 (63.5)		X
Hose	Length ft (m)	Burst Rating	I.D. in (mm)		
9754	6 (1.8)	2:1	1/4 (6.5)	X	
9754E	6 (1.8)	4:1	1/4 (6.5)		X
Cylinders	Capacity Short Tons	Stroke in (mm)	Collapsed Height in (mm)		
C106C	10	6 (155.6)	9.75 (247.7)	X	X
RSS101	10	1 (38.1)	3.50 (88.9)	X	X
RH123	12	3 (76.2)	7.25 (184.2)	X	X
RLS100	10	0.44 (11.1)	1.75 (44.5)	X	X
Spreader	Min. Clearance in (mm)	Max Spread in (mm)	Weight lb (kg)		
HS2000	0.56 (14.2)	4 (101.6)	4.8 (2.2)	X	X
Case	Material	L x H x W in (mm)	Weight w/o Product lb (kg)		
2008632	Heavy Duty Plastic	31.5 x 20.5 x 11.5 (800 x 520 x 292)	12.7 (5.8)	X	X

Values shown in short tons (2,000 lb). To convert to long tons, multiply by 0.893. To convert to metric tons, multiply by 0.907.

Storage Case Dimensions



Plastic Molded Case, 31.5"(L) x 20.5"(H) x 11.5"(W).

Order No.:
SK25T



Note: Storage cases are **not included** with the 25 ton startup kits, they must be ordered separately.



Ordering Information

Kit Contents				Order No	
Hand Pump	Usable Oil Cap. in ³ (cc)	Volume Per Stroke Low / High Press. in ³ (cc)	Weight lb (kg)	SK25T	SK25TE
P59L	66 (1082)	0.72 / 0.15 (12 / 2.6)	8.9 (4.1)	X	X
Gauge	Type	Primary Units	Face Diameter in (mm)		
9040	analog	psi	2.5 (63.5)	X	
9040E	analog	bar	2.5 (63.5)		X
Hose	Length ft (m)	Burst Rating	I.D. in (mm)		
9754	6 (1.8)	2:1	1/4 (6.5)	X	
9754E	6 (1.8)	4:1	1/4 (6.5)		X
Cylinders	Capacity Short Tons	Stroke in (mm)	Collapsed Height in (mm)		
C256C	25	6 (158.8)	10.75 (273)	X	X
RSS302	30	2 (61.9)	4.63 (117.5)	X	X
RH302	30	2 (63.5)	6.25 (158.8)	X	X
RLS300	30	0.5 (12.7)	2.31 (58.7)	X	X
Spreader	Min. Clearance in (mm)	Max Spread in (mm)	Weight lb (kg)		
HS2000	0.56 (14.2)	4 (101.6)	4.8 (2.2)	X	X

Values shown in short tons (2,000 lb). To convert to long tons, multiply by 0.893. To convert to metric tons, multiply by 0.907.

Features & Benefits


- 25 Ton Start-Up Kit covers a range of lifting, shifting, and positioning needs
- Broad range of cylinder types and strokes to fit many applications
- All sets include a t-adaptor (**No. 9670**), a complete coupler set (**No. 9795**), and a quart of oil (**No. 9636**)
- SK25TE kit is CE Compliant



Optional 25 Ton Storage Cases


Power Team offers two different storage boxes to house your SK25T.

Order No.:
MB5



Metal Box Construction, 32" (L) x 19" (W) x 14" (H)

Order No.:
308435OR9

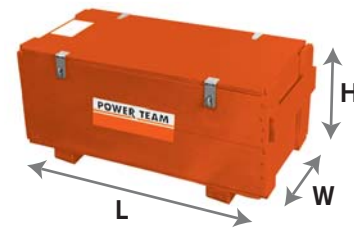

Wooden Box Construction, 36" (L) x 17.5" (W) x 14" (H)

CUSTOMER SERVICE CENTERS

North America

5885 11th Street
Rockford, IL 61109
USA

Customer Service/Order Entry

Tel: +1 800 541 1418
Fax: +1 800 288 7031

info@powerteam.com

Technical Services

Tel: +1 800 477 8326
Fax: +1 800 765 8326

ENGINEERING, MANUFACTURING AND SUPPORT CENTER

World Headquarters

5885 11th Street
Rockford, IL 61109, USA
Tel: +1 815 874 5556
Fax: +1 800 288 7031

info@powerteam.com

European Headquarters

Albert Thijsstraat 12
6471 WX Eyselshoven
The Netherlands

Customer Service/Order Entry

Tel: +31 45 567 8877
Fax: +31 45 567 8878

infoeurope@powerteam.com

Asia Pacific Headquarters

26 Soon Lee Road
Singapore 628086
Singapore

Customer Service/Order Entry

Tel: +65 6265 3343
Fax: +65 6265 6646

infoasia@powerteam.com

Shanghai, China


No. 1568 Hua Shan Road
Treasury Building, 7th Floor
Shanghai 200052, China

Customer Service/Order Entry

Tel: +86 21 2208 5888
Fax: +86 21 2208 5682

infochina@powerteam.com

Visit us at www.powerteam.com

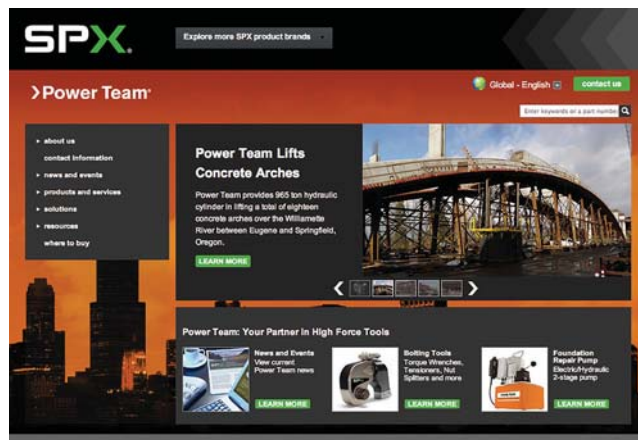

Distributed by:

SPX®