




GN 614.3 | Headless Unthreaded Ball Plungers



Metric Size

Housing and Ball	Stainless steel
Diameter d1	.12 – .24 inch (3 – 6 mm)
Diameter d2	.08 – .18 inch (2 – 4.5 mm)
Length l	.28 – .59 inch (7 – 15 mm)



ISO 9001 Supplier


RoHS Compliant



GN 615.2 | Ball Plungers

Metric Size

Body	Delrin
Ball	Stainless steel or delrin
Thread d1	M6 – M10
Diameter d2	.14 – .24 inch (3.5 – 6 mm)




ISO 9001 Supplier

RoHS Compliant

10

Indexing, Spring and Ball Plungers

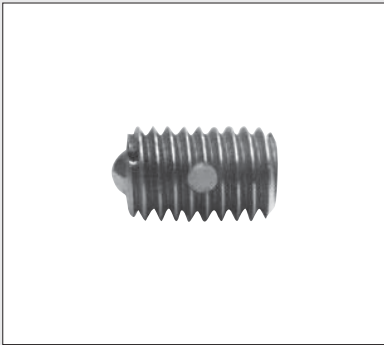


SBP | Ball Plungers

Inch Size • With or without Nylon Locking Element



Body and Ball	Stainless steel
Thread A	4-48 – 5/8-11
Ball Diameter	.062 – .375 inch (1.57 – 9.53 mm)
Length B	.187 – .984 inch (4.75 – 24.99 mm)



RoHS Compliant




SBPNB | Ball Plungers

Inch Size • With or without Nylon Locking Element



Body	Stainless steel
Ball	Nylon
Thread A	4-48 – 5/8-11
Ball Diameter	.062 – .375 inch (1.57 – 9.53 mm)
Length B	.187 – .984 inch (4.75 – 24.99 mm)



RoHS Compliant