


GN 598.7 | Plastic Safety Retractable Handles

Metric Size • Automatic Fold-down Type

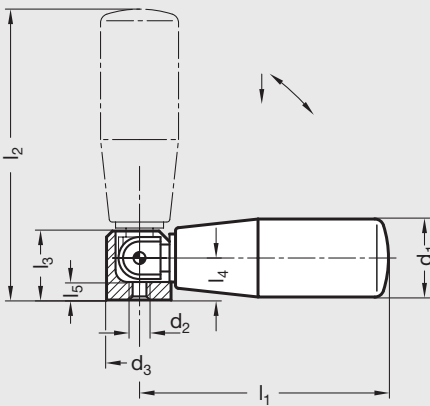

ISO 9001 Supplier

Hand piece
Shiny black phenolic plastic, revolving (Duroplast PF)

Spring loaded automatic retracting mechanism
Steel, black oxide finish

Safety retractable handles GN 598.7 are suitable for applications where the handle must not remain in the operating position.

In order to bring the handle into the operating position, it has to be pulled up 90° from its retracted position against a torsion spring to a stop, and then it is pushed against spring pressure into its hold position. By maintaining the forward thrust on the handle, the handwheel can easily be rotated.

When releasing the handle, the spring automatically returns it back to the retracted position.

Maximum heat resistance of phenolic plastic hand piece: 110°C (230°F).

Metric Table

Dimensions in: millimeters (inches)

Part Number	d ₁	d ₂ Tapped	d ₃	l ₁	l ₂ ≈	l ₃	l ₄	l ₅
23WG65	23 (.91)	M6 x 1.0	20 (.79)	79 (3.11)	88 (3.46)	22 (.87)	13 (.51)	5.5 (.22)
26WG65	26 (1.02)	M6 x 1.0	20 (.79)	93 (3.66)	102 (4.02)	22 (.87)	13 (.51)	5.5 (.22)