




**LRHS | Hand Retractable Spring Plungers**

Inch Size • With L Handle • Lock-Out Type

<b>Body and Pin</b>	Stainless steel
<b>Thread A</b>	1/4-20 – 5/8-11
<b>Diameter D</b>	.16 – .38 inch (4.06 – 9.65 mm)
<b>Length H</b>	.80 – 2.00 inch (20.32 – 50.80 mm)

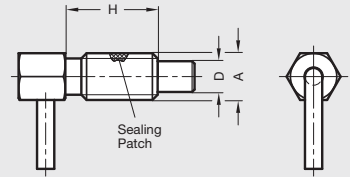

RoHS Compliant




**GN 614.1 | Holding Blocks**

Metric Size • For Press-Fit Ball Plungers

<b>Body</b>	Zinc die-cast, nickel-plated
<b>Diameter d<sub>1</sub></b>	.24 – .31 inch (6 – 8 mm)
<b>Diameter d<sub>2</sub></b>	.20 – .26 inch (5 – 6.5 mm)
<b>Width b</b>	.33 – .41 inch (8.5 – 10.5 mm)

Spring plunger GN 614



ISO 9001 Supplier


RoHS Compliant



**GN 250 | Positioning Blocks**

Metric Size • For Spring Plungers

<b>Body</b>	Steel, case hardened and blackened
<b>Height h</b>	.33 – .41 inch (8.5 – 10.5 mm)
<b>For</b>	GN 614, GN 614 and GN 615.2

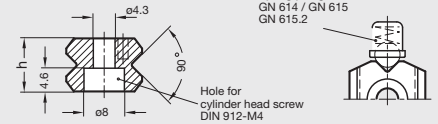

Spring plunger GN 614 / GN 615 GN 615.2

ISO 9001 Supplier


RoHS Compliant



**GN 249 | Ball Buttons**

Metric Size

<b>Body</b>	Steel, hardened and ground
<b>Diameter d<sub>1</sub></b>	.16 – .63 inch (4 – 16 mm)
<b>Diameter d<sub>3</sub></b>	.06 – .31 inch (1.5 – 8 mm)
<b>For</b>	GN 614, GN 615, GN 615.1, GN 616

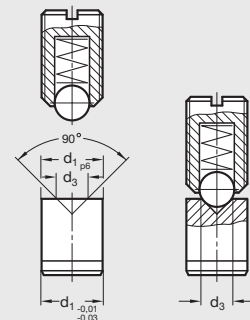

ISO 9001 Supplier

RoHS Compliant