

**NITTO KOHKI**  
**BELTON**




**N-B20N**

20 x 520

17.000

**BANDA: 20 x 520 mm**

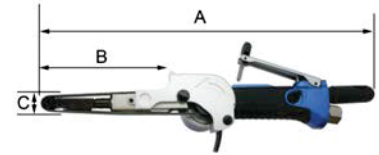

BRAZO ORIENTABLE 360°



**LAR-LB20A**

20 x 520

16.000

**NITTO KOHKI**  
**BELTON**



**N-B30N**

30 x 540

14.000

**BANDA: 30 x 540 mm**



**LAR-630**

30 x 540

12.000

MODELO	Banda mm Ancho x Desarrollo	RPM	Potencia w	Peso Kg	Dimensiones mm A x B x C	Consumo l/min	Entrada de aire	Salida de aire	Uso
N-B20N	20 x 520	17.000	400	1,20	410 x 155 x 24	520	1/4	Trasera	***
LAR-LB20A	20 x 520	16.000	400	1,40	400 x 160 x 28	520	1/4	Trasera	**
N-B30N	30 x 540	14.000	520	2,40	430 x 140 x 31	680	1/4	Trasera	***
LAR-630	30 x 540	12.000	520	2,20	410 x 130 x 32	680	1/4	Trasera	**

Especificaciones obtenidas a una presión de aire constante de 6,2 bar. Manguera recomendada de Ø interior de 8 mm