


powerteam.com



DIGITAL PRESSURE GAUGE

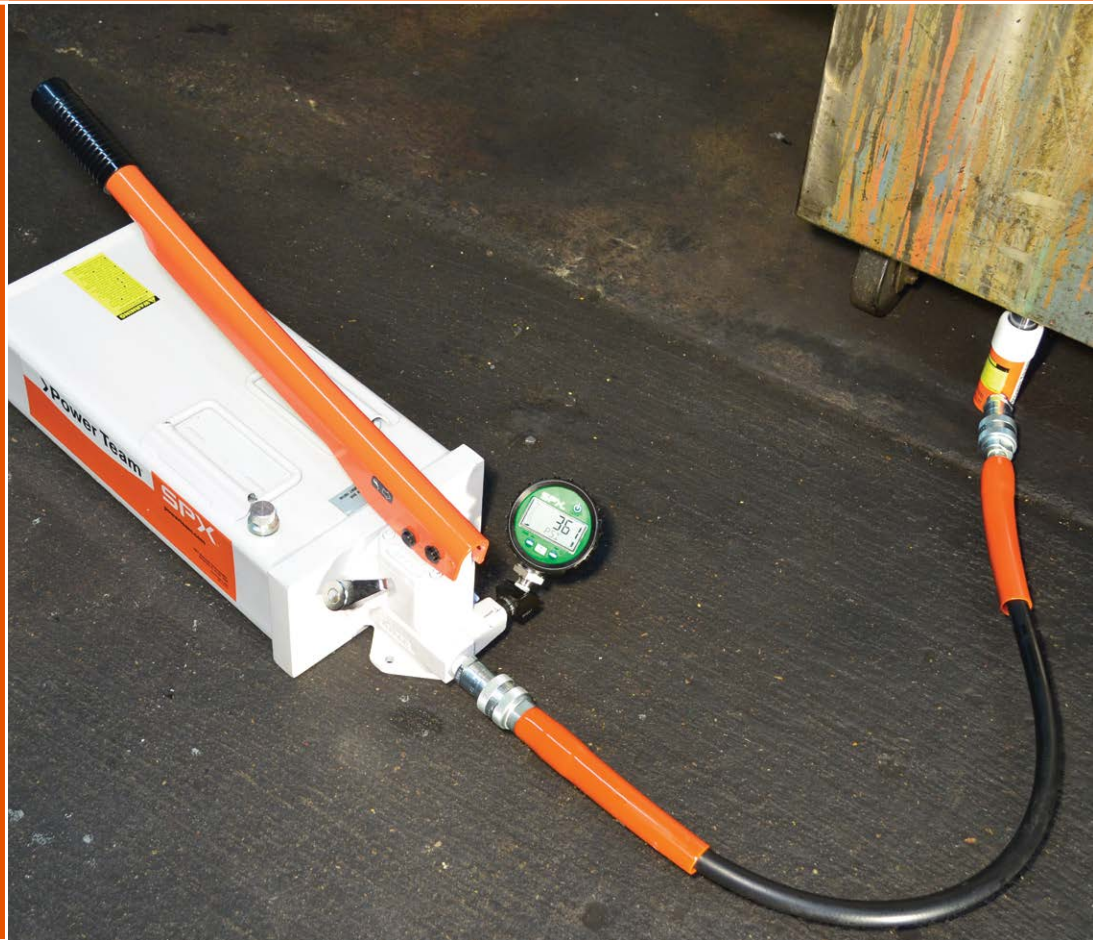

DIGITAL ACCURACY IN A SMALL
AND CONVENIENT PACKAGE

SPX®

Order No.:
9042DG



Power Team's 9042DG was the perfect choice in accurately monitoring the force applied in this H frame press application.



Key Features:

- Digital gauge is easier to read and offers better accuracy¹ than a conventional analog gauge.
- The laser welded stainless steel sensor & socket and the IP67 weatherproof rating make this product suitable for use in the most demanding of applications.
- Five pre-programmed engineering units allow technicians to read pressure in the unit of measure most applicable to the process.
- The gauge also features a bar graph display for enhanced visibility.
- Includes automatic off-battery conservation, pressure tare, minimum pressure memory and maximum pressure.
- Vibration & shock tested to MIL-STD-202G.
- Agency Compliance / Approval: RoHS, CE, ASME B40.7, UL, cUL 61010-1.
- The gauges are calibrated for life at the factory and can be certified in the field if required.



Other Digital Gauges-DG100



- **DG100** (psi) digital gauge.
- **DG100B** (bar) digital gauge.

Upgrade to **DG100 or DG100B** when:



- Hi/Low alarms required.
- Relays triggered by hi/low pressure.
- Pressure display needs to be remotely mounted from measurement location.
- Accurate within 1% @ Full Scale.



Other Analog Gauges



Order No.	Liquid Filled	Primary Unit	Secondary Unit
9040	Silicone	psi	bar
9041	None	psi	bar
9040E	Silicone	bar	psi


¹ Accuracy is 0.5% Full Scale, including the effects of linearity, hysteresis and repeatability. Comparison made against a 9040 analog gauge – including friction, parallax and other reading errors.

Technical Attributes



- 1 Protective rubber boot
- 2 Back-light and large 0.48" (12.2 mm) display easy reading
- 3 Displays in multiple engineering units: psi, bar, mPa, inHg, kg/cm²
- 4 Weatherproof IP67 enclosure
- 5 2,000 hr. life, (2) AA (LR6) batteries
- 6 Typical Cycle Life: 10,000,000
- 7 1/4" NPTF Male Threads

Technical Specifications

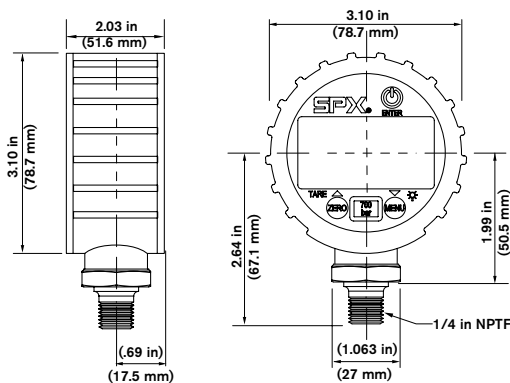


Ordering Information


Order No.	Face Dia. in (mm)	Rated Pressure psi (bar)	Temp Range °F (°C)	Tool Use	IP Rating	Batteries Included	Battery Life hrs	F.S. Accuracy	Product Weight lb (kg)
9042DG	2.5 (64)	0-10,000 (0-700)	-4 to +140 (-20 to +60)	All	IP67	2 x AA (LR6)	2,000	0.5%	0.53 (0.24)



Typical Mounting Setups

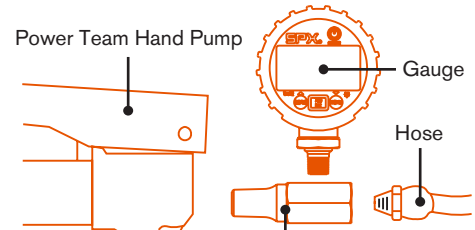

Tee adapter (No. 9670) is used for installing a gauge in line in a hydraulic circuit.

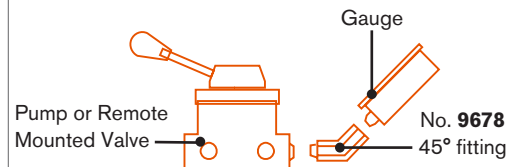

Hardware Requirements



- Does your pump have a 3/8" or 1/4" NPTF port?
- Are you direct-plumbing the gauge to your tool or seeking to quick-disconnect?
- Refer to the Power Team Catalog under the accessories section for a comprehensive range of fittings and couplers to meet your needs.



Safety Tip

When using couplers to detach the gauge, always use a metal cover (ordered separately) on the pump side (female) coupler when the gauge is removed.



Custom Scale

User programmable unit of measure allows you to set a custom scale to have the gauge display torque, force or weight to match the cylinder or tool being used.